



# SIAT

M. J. MAILLIS GROUP

## S8-SK1

Semi Automatic Carton Sealers




Taping unit K11R



S8

SK1



Aluminium telescopic legs



for more details:




S8

SK1


S8 and SK1 models are semi-automatic sealing machines with manual adjustment. Easy to use and simple to adjust, they enable to start the production in just minutes. Thanks to the side drive belts and the K11R or K12R taping units, they allow the perfect sealing of the box.

The machines have been designed in compliance with CE regulations.

> SK1

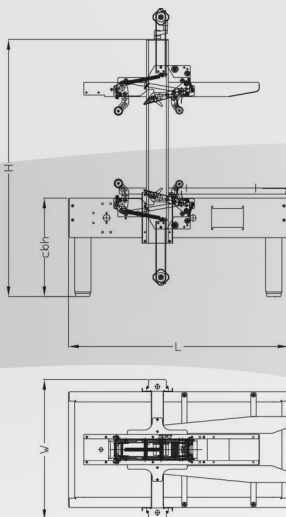

> S8

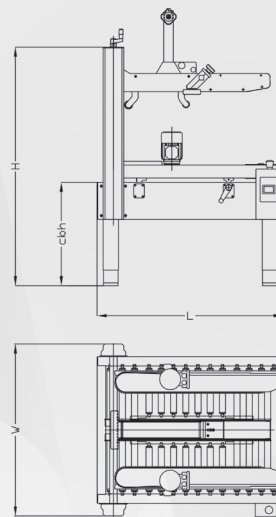

other languages: [www.siat.com](http://www.siat.com)



> Machine dimensions

Dimensioni macchina  
Machinemessungen  
Dimensions machine  
Dimensiones de máquina

Size / Weigh packaging			LxWxH
> S8 / S8/4	130	160	106x100x118
> SK1	160	175	114x78x115

> SK1


	Min.	Max
L	1080	-
W	690	-
H	1260	1600
cbh	485	825
AS 77	585	925
AS 80	685	1025

> S8

	Min.	Max
L	975	-
W	900	-
H	1260	1600
cbh	485	825
AS 77	585	925
AS 80	685	1025


> Taping units

Unità nastranti  
Verschliesseinheiten  
Unités enrubanneuses  
Unidades de precinto



> Box dimensions

Dimensioni delle scatole  
Kartonabmessungen  
Dimensions des boîtes  
Dimensiones de cajas



> SK1

	K11R	
	Min.	Max
l	150	∞
w	140	500
h	100	500

> S8 - S8/1

	K11R std. / K12R on demand	
	Min.	Max
l	150	∞
w	150	500
h	100	500

	K11R/ K12R	
	mm	
A	410 Max	
B	50 / 75	
C	76	

> S8/4


	K11R	
	Min.	Max
l	150	∞
w	120	500
h	100	500

> S08

	K11R std. / K12R on demand	
	Min.	Max
l	150	∞
w	120	500
h	50	n.n.

> Production capacity

Capacità di produzione  
Produktionskapazität  
Capacité de production  
Capacidad de producción



> SK1	Bph
Max pcs.*	1200


> S8	Bph
Max pcs.*	1200

> S8/4	Bph
Max pcs.*	1200

\* Always based on shorter manageable box

> Standard voltage

Voltaggio standard  
Standardspannung  
Tension standard  
Voltaje estándar



> SK1

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,54
Power kW	0,13
Phase	3Ph + PE

> S8

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1
Power kW	0,18
Phase	3Ph + PE

> S8/4

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1
Power kW	0,18
Phase	3Ph + PE

> Optionals

Accessori  
Zubehör  
Accessories  
Accesorios


> AS80

Higher legs  
Set gambe più alte  
Höhere Stützen  
Pieds plus hauts  
Patas más altas



> AS77

Casters  
Set ruote  
Rädchen  
Roulettes  
Ruedas




> RG

Roller conveyor  
Piani a rulli  
Rollenbahnen  
Plans à rouleaux  
Rodillos libres




> GTL - GTR

Extendable conveyor  
Rulliera estensibile  
Ausziehbare rollenbahnen  
Convoyeur extensible  
Rodillos extensibles



> K-125 / K-250

Inkjet printer  
Stampante ad inchiostro  
Tintenstrahldrucker  
Marqueur à jet d'encre  
Impresora de inyección de tinta



SIAT S.p.A.

Via Puecher, 22 - 22078 Turate (CO) Italy  
Tel +39.02.964951 • Fax +39.02.9689727  
[www.siat.com](http://www.siat.com) • [siat@siat.com](mailto:siat@siat.com)